

# World's First Polyamide Complying With EN 45545-2, R6 HL 2

## AKROMID® C28 GF 25 FRT

- 170 MPa tensile strength and an elongation of 2.5 %
- Impact strength above 60 kJ/m<sup>2</sup>
- 30 % higher flowability compared to PA 6.6 GF 25 FR
- Excellent surface
- Custom color


## A Hydrolysis Stabilised PA 6.6 for Less Than 3 € per kg?

Available at AKRO-PLASTIC: PA 6/PP blend with outstanding residual properties after hydrolysis test according to VW standard TL 52682 (1,000 h at 135 °C in G12 Evo)

## AKROMID® B3 GF 30 4 Lite

- Guaranteed delivery reliability
- 8 % lower density than PA 6.6
- Price less than 3 € per kg

### Flexural strength

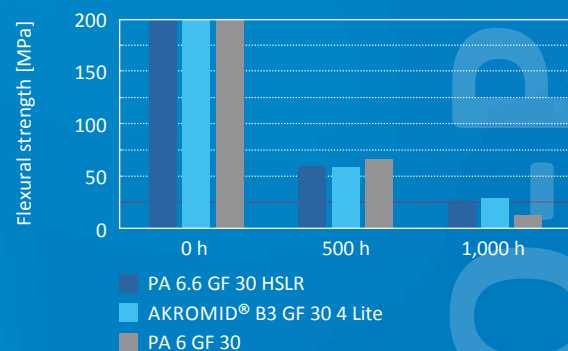

More information can be found at:  
[akro-plastic.com/fakuma](http://akro-plastic.com/fakuma)

Industriegebiet Brohltal Ost • Im Stiefelfeld 1  
56651 Niederzissen  
Germany  
Phone: +49(0)2636-9742-0  
Fax: +49(0)2636-9742-31  
[info@akro-plastic.com](mailto:info@akro-plastic.com)  
[www.akro-plastic.com](http://www.akro-plastic.com)

**AKRO-PLASTIC**  
Think Polyamide

**AKRO-PLASTIC GmbH**  
Member of the Feddersen Group

Disclaimer: All specifications and information given in this brochure are based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. AKROMID®, AKROLEN®, AKROLOY®, AKROTEK®, PRECITE®, AF-Carbon®, AF-Color®, AF-Complex®, AF-Clean®, ICX®, BIO-FED®, M-VERA® and AF-Eco® are registered or applied trademarks of the Feddersen Group.