

Datasheet

Description:

AKROMID® A3 S3 natural (1176) is an unreinforced, dry impact resistant polyamide 6.6 with light inherent color

Applications

Connecting and fixing systems in the automotive and elctro industry

Typical values	Test specification	Method	Unit	Value	
				d.a.m.	moist.*

Mechanical Properties

Tensile modulus	1 mm/min	ISO 527-2	MPa	2800	1700
Stress at yield	50 mm/min	ISO 527-2	MPa	67	45
Strain at yield	50 mm/min	ISO 527-2	%	6	26
Strain at break	50 mm/min	ISO 527-2	%	> 30	> 50
Flexural modulus	2 mm/min	ISO 178	MPa	2850	1600
Charpy impact strength	23°C	ISO 179-1/1eU	kJ/m ²	n.b.	n.b.
Charpy impact strength	-30°C	ISO 179-1/1eU	kJ/m ²	n.b.	n.b.
Charpy notched impact strength	23°C	ISO 179-1/1eA	kJ/m ²	17	95
Charpy notched impact strength	-30°C	ISO 179-1/1eA	kJ/m ²	9	
Ball indentation hardness	358/30	ISO 2039-1	MPa	93	

Electrical Properties

Volume resistivity		IEC 60093	Ohm x cm	1,0E+15	
Surface resistivity		b.o. IEC 60093	Ohm	1,0E+14	
Comparative tracking index	test solution A	IEC 60112		600	

Thermal Properties

Melting temperature	DSC, 10K/min	DIN EN 11357-1	°C	263	
Temp. of deflection under load HDT/A	1,8 MPa	ISO 75	°C	67	
Temp. of deflection under load HDT/B	0,45 MPa	ISO 75	°C	213	

Flammability

Wall thickness			mm	0,4	0,8	1,6	2,0	3,2
Flammability		UL 94	class			HB		
Burning rate (< 100 mm/min)	> 1 mm thickness	FMVSS 302				+		

General Properties

Density	23°C	ISO 1183	g/cm ³	1,1	
Humidity absorption	70°C, 62% r.h.	ISO 1110	%	2,1	

Processing

Molding shrinkage	flow	ISO 294-4	%	1,8	
Molding shrinkage	transverse	ISO 294-4	%	2,1	


b.o.: based on

n.b. = not broken

* = specimen acc. ISO 1110 stored

Continuation

Processing recommendations

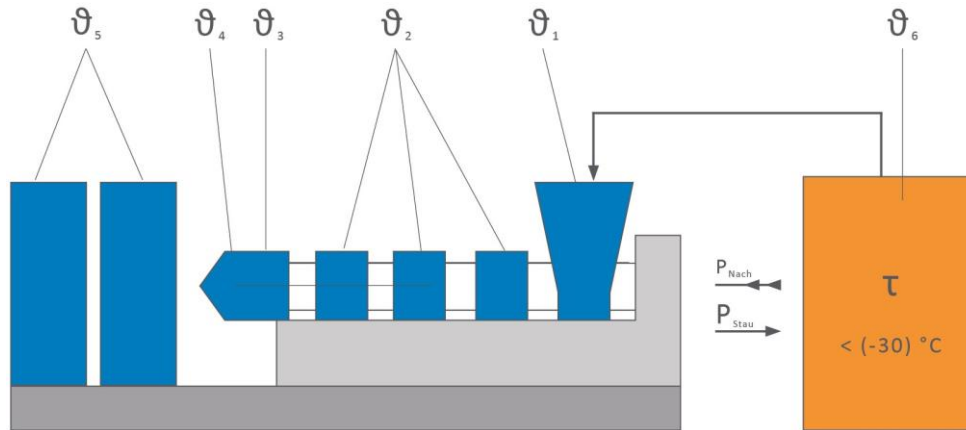

ϑ_6	Drying time	h	0 - 4
ϑ_6	Drying temperature	°C	80
	Processing moisture	%	0,02 - 0,1
ϑ_1	Feed section	°C	60 - 80
ϑ_2	Section 1 - Section 4	°C	260 - 300
ϑ_3	Nozzle	°C	270 - 310
ϑ_4	Melt	°C	280 - 300
ϑ_5	Mould	°C	40 - 80
P_{Nach}	Holding pressure, spec.	bar	300 - 800
P_{Stau}	Back pressure, spez.	bar	50 - 150
	Injection speed		medium to high
	Screw speed	m/min	8 - 15

The listed values are recommendations. Higher values should be used for higher glass loadings. We recommend only de-humidifying or vacuum dryers. Extensive drying can cause filling problems and surface defects.