

Datasheet

Description:

AKROMID® B3 GF 30 1 black (2485) is a 30% glass fibre reinforced, heat stabilised polyamide 6 with high rigidity and strength

Applications

Components in mechanical engineering and in the automotive industry

| Typical values | Test specification | Method | Unit | Value | |
|----------------|--------------------|--------|------|--------|---------|
| | | | | d.a.m. | moist.* |

Mechanical Properties

| | | | | | |
|--------------------------------|----------|---------------|-------------------|-------|------|
| Tensile modulus | 1 mm/min | ISO 527-2 | MPa | 10300 | 6200 |
| Stress at break | 5 mm/min | ISO 527-2 | MPa | 185 | 110 |
| Strain at break | 5 mm/min | ISO 527-2 | % | 3 | 5,5 |
| Flexural modulus | 2 mm/min | ISO 178 | MPa | 8500 | |
| Flexural strength | 2 mm/min | ISO 178 | MPa | 270 | |
| Charpy impact strength | 23°C | ISO 179-1/1eU | kJ/m ² | 95 | 105 |
| Charpy impact strength | -30°C | ISO 179-1/1eU | kJ/m ² | 85 | 85 |
| Charpy notched impact strength | 23°C | ISO 179-1/1eA | kJ/m ² | 13 | 18 |
| Charpy notched impact strength | -30°C | ISO 179-1/1eA | kJ/m ² | 12 | 12 |
| Ball indentation hardness | 961/30 | ISO 2039-1 | MPa | 230 | |

Electrical Properties

| | | | | | |
|----------------------------|-----------------|----------------|----------|---------|---------|
| Volume resistivity | | IEC 60093 | Ohm x cm | 1,0E+13 | 1,0E+10 |
| Surface resistivity | | b.o. IEC 60093 | Ohm | 1,0E+12 | 1,0E+10 |
| Comparative tracking index | test solution A | IEC 60112 | | 600 | |

Thermal Properties

| | | | | | |
|---|--------------|----------------|----------|------|--|
| Melting temperature | DSC, 10K/min | DIN EN 11357-1 | °C | 220 | |
| Temp. of deflection under load HDT/A | 1,8 MPa | ISO 75 | °C | 210 | |
| Temp. of deflection under load HDT/B | 0,45 MPa | ISO 75 | °C | 220 | |
| Temp. of deflection under load HDT/C | 8 MPa | ISO 75 | °C | 150 | |
| Coeff. of linear therm. expansion, parallel | 23°C - 80°C | ISO 11359-1/2 | 1,0E-4/K | 0,16 | |
| Coeff. of linear therm. expansion, normal | 23°C - 80°C | ISO 11359-1/2 | 1,0E-4/K | 0,95 | |

Flammability

| | | | | | | | |
|-----------------------------|------------------|----------------|-------|-----|-----|-----|-----|
| Wall thickness | | | mm | 0,4 | 0,8 | 1,6 | 3,2 |
| Flammability | | UL 94 | class | | HB | HB | HB |
| GWFI | | IEC 60695-2-12 | °C | | 650 | | |
| Burning rate (< 100 mm/min) | > 1 mm thickness | FMVSS 302 | | + | | | |

General Properties

| | | | | | |
|--------------------------------------|-----------------|----------|-------------------|-----------|--|
| Density | 23°C | ISO 1183 | g/cm ³ | 1,36 | |
| Content reinforcement/Content Filler | | ISO 1172 | % | 30 | |
| Humidity absorption | 70°C, 62% r.h. | ISO 1110 | % | 2,1 - 2,3 | |
| Water absorption | 23°C, saturated | ISO 62 | % | 6,3 - 6,9 | |

AKRO-PLASTIC GmbH

Commercial registered office: Niederrissen
Commercial Register: Koblenz HRB 12227
Managing Director: Andreas Stuber, Dirk Steinbrück
Chairman of the Supervisory Board: Dr. Matthias von Rönn

The information contained herein is based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. AKRO®, AKROMID®, AKROLEN®, AKROLOY® and AKROTEK® are registered or pending trademarks of the Feddersen Group.

Continuation

| Typical values | Test specification | Method | Unit | Value d.a.m. |
|----------------|--------------------|--------|------|-----------------|
|----------------|--------------------|--------|------|-----------------|

Processing

| | | | | |
|-------------------|-----------------|-----------|----|-----------|
| Flowability | 7 x 3,5 mm & ** | AKRO | mm | 660 |
| Molding shrinkage | flow | ISO 294-4 | % | 0,1 - 0,3 |
| Molding shrinkage | transverse | ISO 294-4 | % | 0,5 - 0,7 |


b.o.: based on

* = specimen acc. ISO 1110 stored

** = mould temperature: 80°C, melt temperature: 270°C, injection pressure: 750 bar

Continuation

Processing recommendations

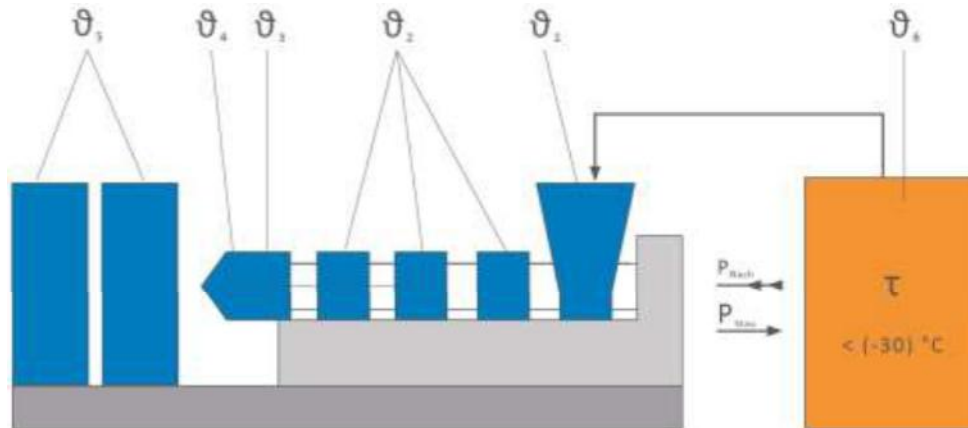

| | | | |
|---------------|-------------------------|-------|----------------|
| ϑ_6 | Drying time | h | 0 - 4 |
| ϑ_6 | Drying temperature | °C | 80 |
| | Processing moisture | % | 0,02 - 0,1 |
| ϑ_1 | Feed section | °C | 60 - 80 |
| ϑ_2 | Section 1 - Section 4 | °C | 240 - 290 |
| ϑ_3 | Nozzle | °C | 260 - 300 |
| ϑ_4 | Melt | °C | 270 - 290 |
| ϑ_5 | Mould | °C | 80 - 100 |
| P_{Nach} | Holding pressure, spec. | bar | 300 - 800 |
| P_{Stau} | Back pressure, spez. | bar | 50 - 150 |
| | Injection speed | | medium to high |
| | Screw speed | m/min | 8 - 15 |

The listed values are recommendations. Higher values should be used for higher glass loadings. We recommend only de-humidifying or vacuum dryers. Extensive drying can cause filling problems and surface defects.