

PA6 – Polyamide 6 PA6 + PP GF30

AKROMID® B3 GF 30 9 L black (7227)

Tensile modulus

8500 MPa

1 mm/min

ISO 527-2

Stress at break

135 MPa

5 mm/min

ISO 527-2

Charpy impact strength

23° C

ISO 179-1/1eU

AKROMID® B3 GF 30 9 L black (7227) is a 30% glass fibre reinforced and excellent surface quality polyamide-blend with a reduced density compared to standard PA6 GF 30

Typical applications

Mainly technical components in the automotive and electronic industry, where a weight and cost reduction is required



Mechanical Properties

Tensile modulus (1 mm/min | ISO 527-2)

d.a.m.

8500 MPa

conditioned

6500 MPa

Stress at break (5 mm/min | ISO 527-2)

d.a.m.

135 MPa

conditioned

100 MPa

Strain at break (5 mm/min | ISO 527-2)

d.a.m.

2,9 %

conditioned

4,4 %

Flexural modulus (2 mm/min | ISO 178)

d.a.m.

8500 MPa

Flexural strength (2 mm/min | ISO 178)

d.a.m.

200 MPa

Flexural strain at break (2 mm/min | ISO 178)

d.a.m.

3,4 %

Charpy notched impact strength (23° C | ISO 179-1/1eA)

d.a.m.

15 kJ/m²

conditioned

16 kJ/m²

Thermal Properties

Temperature of deflection under load HDT/A (1,8 MPa | ISO 75)

195 °C

Melt temperature (DSC, 10K/min | DIN EN 11357-1)

220 °C



Flammability

GWFI (IEC 60695-2-12)

0,8mm Wall thickness

650 °C


Burning rate (<100 mm/min) (> 1 mm Thickness | FMVSS 302)

+

Disclaimer:

All specifications and information given on this website are based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. AKRO®, AKROMID®, AKROLEN®, AKROLOY®, AKROTEK®, ICX® and PRECITE® are registered trademarks of the Feddersen Group.

Stress strain chart at 23°C

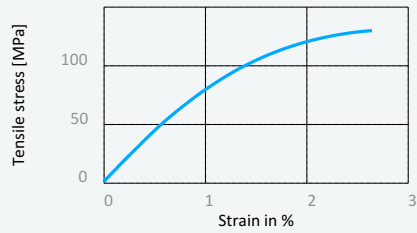

General properties

Density (23°C ISO 1183)	1,27 g/cm ³
Humidity absorption (70°C, 62% r.H. ISO 1110)	1,4 %
Molding shrinkage (flow ISO 294-4)	0,1 - 0,3 %
Molding shrinkage (transverse ISO 294-4)	0,5 - 0,7 %



Rheological Properties

MVR (275°C/5kg ISO 1133)	14 cm ³ /10min
----------------------------	---------------------------

Disclaimer:


All specifications and information given on this website are based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. AKRO®, AKROMID®, AKROLEN®, AKROLOY®, AKROTEK®, ICX® and PRECITE® are registered trademarks of the Feddersen Group.

PA6 – Polyamide 6 PA6 + PP GF30

AKROMID® B3 GF 30 9 L black (7227)

Processing information

The listed values are recommendations. Higher values should be used for higher glass loadings. We recommend only dehumidifying or vacuum dryers. Extensive drying can cause filling problems and surface defects.

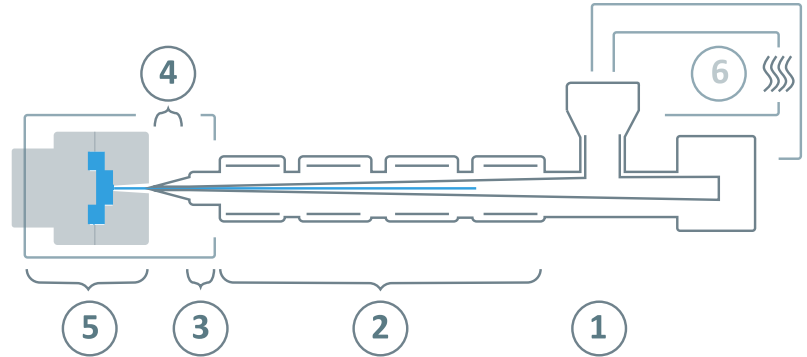

⑥	Drying time	0 - 4 h
	Drying temperature ($\tau \leq -30^{\circ}\text{C}$)	80°C
	Processing moisture	0,02 - 0,1%
①	Feed section	60 - 80°C
②	Temperature zone 1 - Zone 4	220 - 290°C
③	Nozzle temperature	240 - 300°C
④	Melt temperature	240 - 290°C
⑤	Mold temperature	70 - 100°C
→	Holding pressure, spec.	300 - 800 bar
←	Back pressure, spec.	50 - 150 bar
	Injection speed	medium to high
	Screw speed	5 - 15 m/min

Disclaimer:

All specifications and information given on this website are based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. AKRO®, AKROMID®, AKROLEN®, AKROLOY®, AKROTEK®, ICX® and PRECITE® are registered trademarks of the Feddersen Group.