

## Datasheet

### Description:

AKROMID® B3 GF 40 black (3383) is a 40% glass fibre reinforced polyamide 6 with high rigidity and strength

### Applications

Components in mechanical engineering and in the automotive industry

Typical values	Test specification	Method	Unit	Value	
				d.a.m.	moist.*

### Mechanical Properties

Tensile modulus	1 mm/min	ISO 527-2	MPa	12800	8200
Stress at break	5 mm/min	ISO 527-2	MPa	210	130
Strain at break	5 mm/min	ISO 527-2	%	4	5
Flexural modulus	2 mm/min	ISO 178	MPa	10300	
Flexural strength	2 mm/min	ISO 178	MPa	300	
Charpy impact strength	23°C	ISO 179-1/1eU	kJ/m <sup>2</sup>	110	110
Charpy impact strength	-30°C	ISO 179-1/1eU	kJ/m <sup>2</sup>	110	
Charpy impact strength	-40°C	ISO 179-1/1eU	kJ/m <sup>2</sup>	110	
Charpy notched impact strength	23°C	ISO 179-1/1eA	kJ/m <sup>2</sup>	18	23
Charpy notched impact strength	-30°C	ISO 179-1/1eA	kJ/m <sup>2</sup>	14	
Charpy notched impact strength	-40°C	ISO 179-1/1eA	kJ/m <sup>2</sup>	14	
Izod notched impact strength	23°C	ISO 180/1A	kJ/m <sup>2</sup>	20	
Izod notched impact strength	-40°C	ISO 180/1A	kJ/m <sup>2</sup>	14	

### Thermal Properties

Melting temperature	DSC, 10K/min	DIN EN 11357-1	°C	222
Temp. of deflection under load HDT/A	1,8 MPa	ISO 75	°C	215

### Flammability

Wall thickness			mm	0,4	0,8	1,6	2,0	3,2
Flammability		UL 94	class			HB		
Burning rate (< 100 mm/min)	> 1 mm thickness	FMVSS 302				+		

### General Properties

Density	23°C	ISO 1183	g/cm <sup>3</sup>	1,45
Content reinforcement/Content Filler		ISO 1172	%	40

### Processing


Flowability	7 x 3,5 mm & **	AKRO	mm	480
Molding shrinkage	flow	ISO 294-4	%	0,1 - 0,3
Molding shrinkage	transverse	ISO 294-4	%	0,5 - 0,7

\* = specimen acc. ISO 1110 stored

\*\* = mould temperature: 80°C, melt temperature: 270°C, injection pressure: 750 bar

#### Continuation

### Processing recommendations

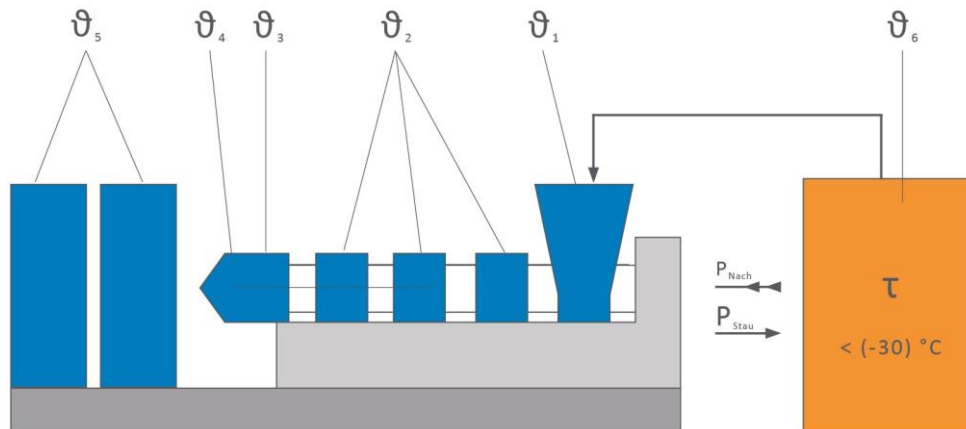

$\vartheta_6$	Drying time	h	0 - 4
$\vartheta_6$	Drying temperature	°C	80
	Processing moisture	%	0,02 - 0,1
$\vartheta_1$	Feed section	°C	60 - 80
$\vartheta_2$	Section 1 - Section 4	°C	240 - 290
$\vartheta_3$	Nozzle	°C	260 - 300
$\vartheta_4$	Melt	°C	270 - 290
$\vartheta_5$	Mould	°C	80 - 100
$P_{Nach}$	Holding pressure, spec.	bar	300 - 800
$P_{Stau}$	Back pressure, spez.	bar	50 - 150
	Injection speed		medium to high
	Screw speed	m/min	8 - 15

The listed values are recommendations. Higher values should be used for higher glass loadings. We recommend only de-humidifying or vacuum dryers. Extensive drying can cause filling problems and surface defects.